

NTP Server Design as a Mitigation of Time Difference at Perum LPPNPI Kendari Branch

Nyaris Pambudiyatno¹, Muh. Rayhan Kurniawan Putra¹, Argo Pragolo³

¹Surabaya Aviation Polytechnic, Jemur Andayani I Street No. 73, Siwalankerto, Wonocolo District, Surabaya, 60236, East Java, INDONESIA

Article Info	Abstract
Article history: Received 1 August, 2024 Revised 11 August, 2024 Accepted 30 August, 2024	In the world of aviation, it takes the right time, time synchronization is very important for the aviation system. If the time of the flight telecommunication facility is out of sync or out of sync, the flight data will be chaotic, so it is not known when the aircraft will land. If the time is not synchronized, data on accident incidents will be difficult to find. This research method uses an Microcontroller connected to the Network Time Protocol Server through internet media, then the Network Time Protocol Server generates time data in the form of Coordinate Universal Time. The Microcontroller functions as a server on the device that will perform time synchronization, and the Network Time Protocol Server data has accurate time accuracy. In the event of a time shift it will be compensated by the Microcontroller. Keyword: Network Time Protocol, Coordinate Universal Time, Microcontroller, Internet.
*Corresponding Author: Name: Nyaris Pambudiyatno Email: nyaris@poltekbangsby.ac.id	

1. Introduction

In today's era of globalization, air transportation technology is developing rapidly. In electronic transaction systems and telecommunications technology, it is very important for related parties to stay connected at the same time. All equipment must operate synchronously or in harmony within the system. Even if the system start time is set accurately, the time of each system will change after some time, if there is no attempt to synchronize the overall system time. Each system will calculate the clock time accurately, so the longer the difference accumulates, the greater the time difference. One example of the use of technology to obtain accurate time is *Network Time Protocol (NTP)* and *Global Positioning System (GPS)* [1] [2] [3].

Network Time Protocol (NTP) is a mechanism or protocol used to synchronize timekeepers in a computer system and network [2]. Considering that in the world of aviation, especially at AIRNAV, the Kendari Branch does not have an NTP Server, so for timekeeping, it still uses a digital clock that is not synchronized with the *UTC* so that the time designation is sometimes not synchronized with the time *UTC*

Realtime. This is not in accordance with the Regulation of the Minister of Transportation of the Republic of Indonesia Number PM 65 of 2017 concerning Civil Aviation Safety Regulations Part 170 concerning Aviation Traffic Regulations [3] [4] [5]. This is often a finding from the Airport Authority Office due to improper or inconsistent time designation. If the aviation telecommunication facility has a time that is not synchronized, it will experience difficulties in a situation such as the time difference when the aircraft will land and take off between APP and ADC units. To overcome this problem, the author made a design of a tool that can synchronize the time in the APP and ADC rooms at AIRNAV Kendari Branch based on a microcontroller using ESP32, GPS NEO-M8M and LED P10 that takes time data *UTC (Coordinated Universal Time)* from the internet and local time from *Global Positioning System (GPS)* [6] [7] [8] [9].

2. Research Method

The author uses the research method "*Research and Development*" (Research and Development). *Research and Development* is a research method used to produce a product and test the effectiveness of the product [10]. The research and development carried out in this study is based on the PPE model (*planning, production, and evaluation*) developed by Richey and Klein. Richey and Klein in Sugiyono stated "*The focus of research and development design can be on front end analysis planning, production and evaluation (PPE)*" including:

1. *Planning*

Planning (planning) means the activity of making a product plan. This activity began with a needs analysis carried out through research [6] [11].

2. *Production*

Production (Produce) is the activity of making products based on the design that has been made [8] [12].

3. *Evaluation*

Evaluation (evaluation) is an activity to test and assess how high the product made has met the specified specifications [9] [13] [14] [15].

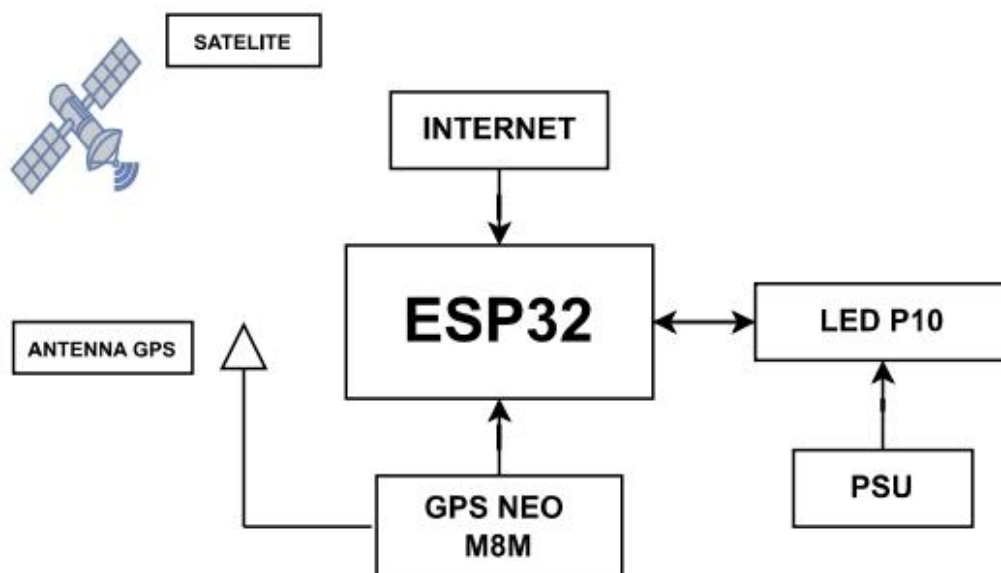


Figure 1. Block Diagram

In figure 1. Above is a block diagram of the NTP server design as a mitigation of time differences at PERUM LPPNPI KENDARI BRANCH.

2.1 How The Tool Works

The following is how the NTP server design based on the esp32 microcontroller works [16] [17].

1. For time server *data retrieval* from the internet, the ESP32 must be connected to a wifi network connected to the internet. Once connected to the internet, the ESP32 will send a request containing information about the UTC time and be responded to by the NTP server with the right time.
2. For GPS, the Neo M8M will analyze the signal received from the GPS satellite to determine the exact location and use the time signal sent by the satellite to calculate the distance and determine the exact time. *Triangulation* is carried out using a minimum of 3 satellites to determine the exact location. Once the time signal from the satellite is received, the GPS module will process the data to determine the accurate time.
3. Once the accurate time data is determined, the time information from the internet and GPS of the Neo M8M will be entered as input to the ESP32. The data input will produce 2 outputs of information at the same time. The time information from the internet will act as the main and the time information from the GPS acts as a backup.
4. The output of the ESP32 will be displayed on the P10 LED display which will display the same time information i.e. UTC time information.

2.2 Tool Testing Techniques

This study uses functional testing techniques, to ensure that NTP Server and GPS can work correctly and provide accurate results [18]. The stages in this test are:

1. Time Sync Testing
This test is carried out to ensure that NTP Server and GPS can adjust the time well and synchronize with the standard time, which is UTC. This test is carried out by comparing the displayed time information with the time that is the source of reference, namely the atomic clock.
2. Time Accuracy Testing
This test was carried out that the NTP Server and GPS can provide accurate results in showing time. This test is carried out by comparing the displayed time with the standard time, namely *UTC*.

2.3 Data Analysis Techniques

The data analysis technique used in this study is comparative analysis by comparing the value of parameters that have been made with other devices then the data that has been collected is described systematically [19]. In this case compare:

1. The time speed range when the ESP32 sends a time format request over the internet and the time format from the GPS displays the time format on the LED screen without any interference and with any interference.
2. In the time range between the time given from the internet and GPS and the time present on the atomic clock will be recorded as the accuracy of the time comparison.

3. Results And Discussion

3.1. Planning

In this part, tool design consists of tool design, how the tool works, and tool components used in the manufacture of equipment. The design of the tool in "NTP SERVER DESIGN AS MITIGATION OF TIME DIFFERENCE IN PERUM LPPNPI KENDARI BRANCH" can be seen in the diagram block image below.

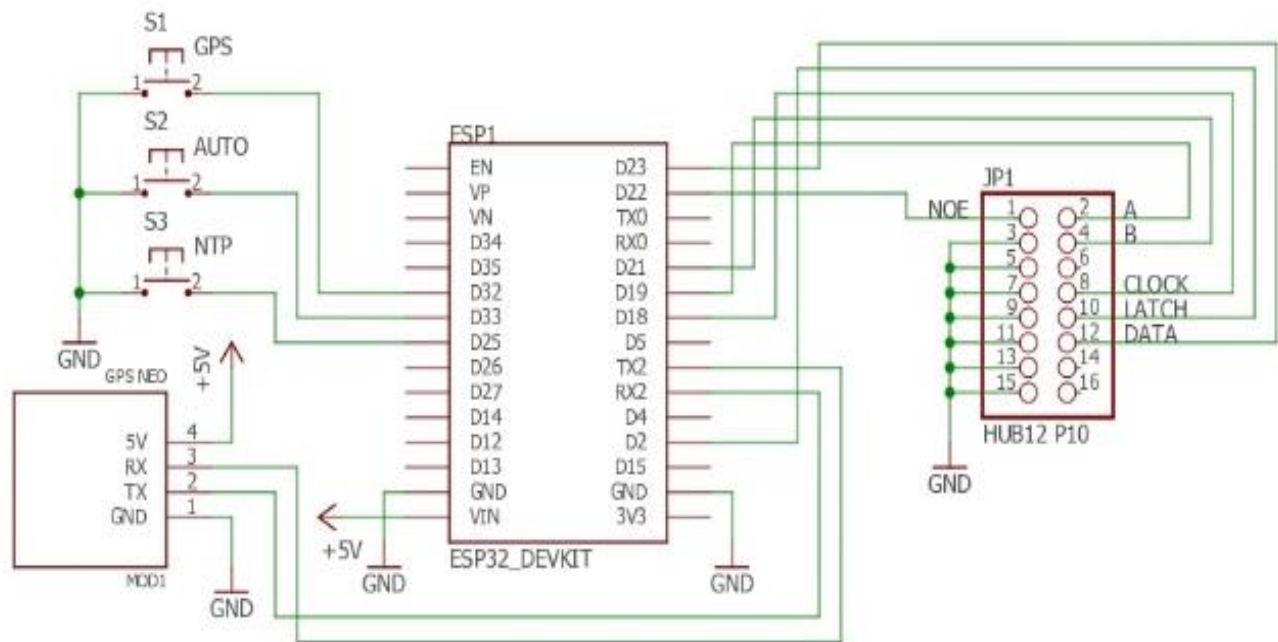


Figure 2. Tool Design Configuration

Starting from the ESP32 which is connected to the P10 LED using a cable from the P10 LED, followed by GPS connected to the ESP32 with the configuration of the VCC pin on the GPS NEO M8M to the 5v pin on the ESP32 as a voltage source on the component, the GND pin on the GPS NEO M8M is connected to the GND pin on the ESP32. Connecting the GPS NEO M8M to the ESP32 with the TX pin configuration on the GPS NEO M8M to the RX2 pin of the ESP32 for sending GPS data to the satellite, then connecting the RX pin on the GPS NEO M8M to the TX2 pin on the ESP32 as receiving data from the satellite to the GPS and receiving it to the ESP32. Finally, connect the PSU to the P10 LED with the configuration of the L and N pins on the PSU to the AC voltage source, the V+ pin on the PSU is connected to the Positive LED and the V- pin PSU is connected to the Negative LED as the voltage source of all components used [18] [19] [20].

The way this tool works starts from turning on the P10 LED Screen by plugging the adapter into the voltage source. How the tool works can be seen in the Flowchart image below.

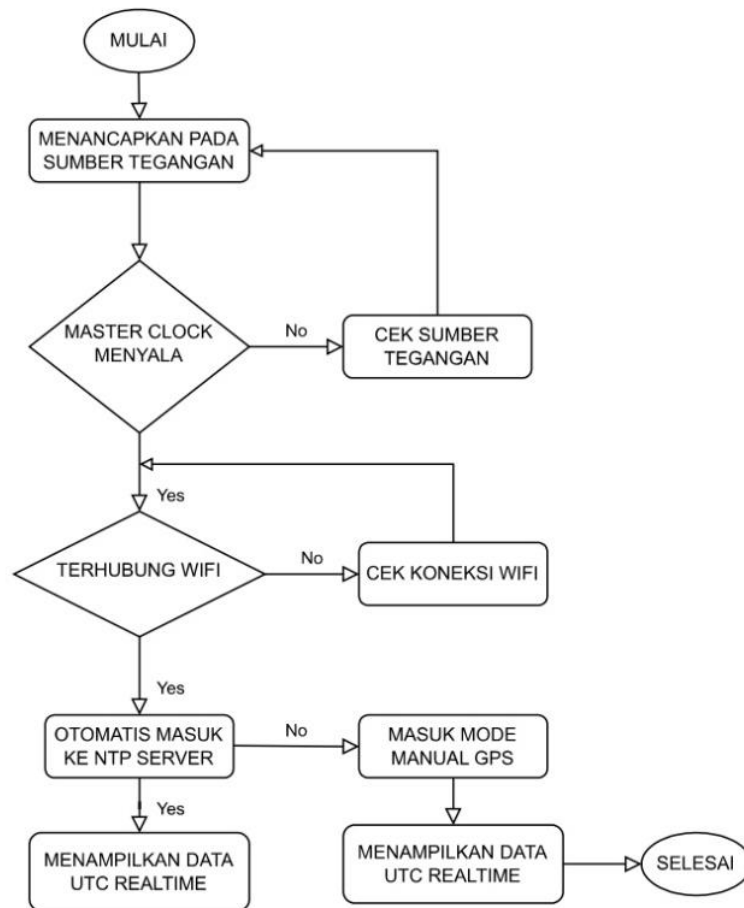


Figure 3. Flowchart How Tools Work

Starting from plugging the tool into the voltage source that is around, if the masterclock does not turn on, you can check the voltage source used, if it turns on, the masterclock will automatically connect to the wifi that has been set using the wifi around. The device is not connected to wifi can be checked on the wifi connection, if it is connected, it will automatically enter the NTP Server and will automatically display the time data i.e. the hour UTC in realtime, if the wifi is disconnected, it will automatically enter GPS mode and automatically display the time data UTC in realtime [15] [19] [22].

3.2. Production

3.2.1 Assembly of the tool

After making a design plan for the manufacture of the tool, the design of the tool is carried out which has 2 stages, namely: software installation and hardware installation. The design of the tool is completed in accordance with the planning that has been determined, followed by the stage of testing the tool. The test was carried out with the aim of finding out the performance of the equipment and also the relationship between hardware and software.

3.2.2 Tool Testing

The test is carried out after all components have been assembled, this aims to ensure that the components work properly. The results of the equipment test can be seen in the following table:

3.2.3 Duration of Appearance

At the time of initial power-on, it will be calculated how long the tool will display the time information. The following is a table of test results:

Table 1. Display Duration on P10 LEDs

It	Mode	Display Duration on P10 LEDs	Documentation
1.	Auto (start on)	9 seconds	
2.	Auto (NTP to GPS)	16 seconds	
3.	Manual NTP	0.16 seconds	
4.	Manual GPS	0.20 seconds	

The test duration of the display when turned on in each mode is different and obtained with accurate results using the time calculation from the stopwatch on the laptop.

3.2.3 Accuracy Test

The results of the hardware and software design will be tested to prove whether the data taken from NTP and GPS is appropriate or real-time by comparing the data with the UTC time on the following website <https://time.is/id/UTC>. The results of the time accuracy test can be seen in the table below:

Table 2. Accuracy Testing

It	Input	Accuracy Percentage	Documentation
1.	NTP	100%	
2.	GPS	100%	


3. Power Supply Unit Trial

The voltage input from the design results is tested to ensure that the incoming voltage is in accordance with the provisions used as a voltage source from the P10 LED.

Table 3. Voltage Source Test

It	Voltage Source	Result	Documentation
1.	Air conditioning	224.0 AC	

2. DC 5V

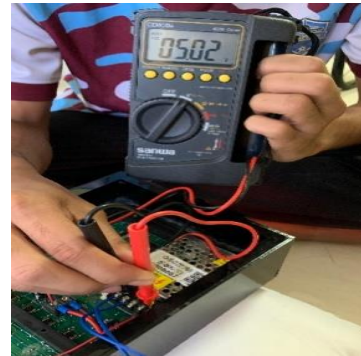

4. Internet Trial

The internet connection really needs to be tested to be able to connect to the NTP server, the author tested whether the internet speed affects the connection on the NTP server. Here are the results of the internet trial:

Table 4. Internet Trial

It	Wifi	Status	Documentation
1.	HOTSPOT POLTEKBANG	Does not light up	
2.	Mobile	Turn on	

If the wifi does not connect or the wifi speed is slow, then the NTP server cannot retrieve time data and cannot display UTC time in realtime. When the wifi speed is fast, the time data taken from the NTP Server will also be synchronized and displayed in realtime.

5. Antenna Test on GPS

GPS antennas need to be tested to find out whether when indoors or in enclosed places, the GPS antenna can pick up signals from satellites. The results of the GPS antenna test can be seen in the table below:

Table 5. GPS Antenna Location Test

It	Location	Status	Documentation
1.	Indoor	Can't connect to GPS	
2.	Outdoor	Can connect with GPS	

When the GPS antenna is indoors, it cannot pick up signals from the satellite, so it cannot synchronize with *realtime UTC* time. In the table above, when the GPS mode is still running the clock, but the clock will change at any time because it cannot synchronize with *realtime UTC time*.

Based on the design planning that has been made, the design results that have been designed are in accordance with the initial planning of the design, on the MASTER CLOCK which has a time information source from the NTP Server and GPS can be displayed on the P10 LED screen as a display of time information in UTC format. The input of the time information source can be synchronized well, so that UTC time can be displayed in realtime [20] [21] [22].

4. Conclusion

In this final project, the author analyzes the performance of the NTP SERVER as a mitigation of time differences at the Kendari branch of Airnav. Based on the results of testing and analysis, the following conclusions were obtained:

1. The NTP server design as a mitigation of time difference at AIRNAV Kendari Branch as a solution for accurate time information, this design uses ESP32 which is connected to WIFI, GPS module, and P10 LED. In this process, the ESP32 automatically connects to the wifi that has been set in the ARDUINO IDE coding and automatically enters the NTP SERVER as the main display of the time information source. At the same time the GPS module receives information signals from satellites and then forwards to ESP32 to manage time information data, but this GPS module is only *standby*, if the NTP Server does not receive information data or is disconnected from *the server*, the GPS module can be a *backup* from the data of time information sources. The data

information source from the NTP server and GPS will be displayed on the P10 LED screen. This design has succeeded in displaying UTC data in real-time from the NTP server and GPS data information sources which are the reference for world time.

2. This design was tested by comparing the time display results of the NTP server design with the UTC time display on the *website* displayed on the computer.
3. This design features 2 input time information sources, there are 3 display modes in this design, namely Auto Mode (NTP to GPS), NTP Manual Mode and GPS Manual Mode. These 3 modes can be displayed on the P10 LED screen and appear in *realtime*.

When using wifi on an android phone during auto mode, it can run smoothly, but ESP32 does not want to reconnect to wifi when disconnected. Meanwhile, if you use wifi on an iphone cellphone, auto mode does not want to run but wifi can *reconnect*.

Acknowledgements

The author expresses his greatest praise and gratitude to God Almighty for his smoothness and grace. And also to all parties involved, we thank you very much. The author realizes that this final project is still far from perfect. The author apologizes for all mistakes and inappropriate words. I am looking forward to constructive suggestions and criticisms for future improvements.

References

- [1] Adnan, D. R. A., Kaloko, J., Sihombing, K., & Mahmud, P. (2022). Pengembangan Media Poster Sebagai Media Edukasi Orangtua Dalam Membantu Mencegah Perilaku Perundungan. *JKKP (Jurnal Kesejahteraan Keluarga dan Pendidikan)*, 9(02), 234–242. <https://doi.org/10.21009/jkkp.092.10>
- [2] Aprilia, T., Sutrio, S., & Sahidu, H. (2021). Pengembangan Perangkat Pembelajaran Model Quantum Learning Untuk Meningkatkan Hasil Belajar Fisika Peserta Didik. *ORBITA: Jurnal Kajian, Inovasi dan Aplikasi Pendidikan Fisika*, 7(1), 72. <https://doi.org/10.31764/orbita.v7i1.3437>
- [3] ERMALENA, S. S., WENING, S., & BUDIASTUTI, E. (2023). Tunik Menggunakan Pengaplikasian Teknik Colet-Boshi Shibori Pada Wanita Karir Dengan Bentuk Tubuh Pendek Gemuk. *Fashion and Fashion Education Journal*, 12(1), 91–104. <https://doi.org/10.15294/ffej.v12i1.64613>
- [4] Iswanto. (2019). Pentingnya Sinkronisasi Waktu pada Jaringan Komputer. *Jurnal FIKI*, IX(1), 2087–2372. <http://jurnal.unnur.ac.id/index.php/jurnalfiki>
- [5] Ketut Bayu Semara Darma, D., Bagus, B., Telekomunikasi dan Navigasi Udara, T., & Penerbangan Surabaya Jl Jemur Andayani, P. I. (2018). *Rancangan Penunjuk Waktu Atom Menggunakan GPS (Global Positioning System) Dan NTP (Network Time Protocol) sebagai Analisa Perbandingan Keakuratan Waktu*.
- [6] Purnama, S. (2016). Metode Penelitian Dan Pengembangan (Pengenalan Untuk Mengembangkan Produk Pembelajaran Bahasa Arab). *LITERASI (Jurnal Ilmu Pendidikan)*, 4(1), 19. [https://doi.org/10.21927/literasi.2013.4\(1\).19-32](https://doi.org/10.21927/literasi.2013.4(1).19-32)
- [7] Seftiyana, V. C. (2021). Mental Workload of Air Traffic Control (ATC) Personnel At Adisutjipto International Airport. *Vortex*, 2(2), 57. <https://doi.org/10.28989/vortex.v2i2.1008>
- [8] Setiawan, A. B. (2017). Implementasi Sinkronisasi Waktu dengan Network Time Protocol untuk

Pemantauan Keamanan Aktivitas Jaringan Telekomunikasi. *Jurnal Penelitian Pos dan Informatika*, 5(2), 175. <https://doi.org/10.17933/jppi.2015.0502004>

- [9] R. Mehta and V. Wasudarae Khond, "Web-Based Level Crossing Control System Monitoring Device (Software)", *JSTN*, vol. 1, no. 2, pp. 29–36, May 2024.
- [10] E. Kurniawan, M. Adnin Nanda Pratama, and E. Eddi, "Sound-Based Light Control System in The Ship's Room With Uno Arduino", *JSTN*, vol. 1, no. 1, pp. 1–6, Apr. 2024.
- [11] H. Aji Bimansyah, S. Mulyanto Herlambang, and E. Eddi, "Design and Construction of Fire Detection Equipment on Electrical Panels Automatically Using IOT", *JSTN*, vol. 1, no. 1, pp. 7–12, Apr. 2024.
- [12] A. Dwi Santoso, D. Eka Mahendra, and D. Dirhamsyah, "Sistem Monitoring Suhu dan Getaran Pada Motor Listrik Dari Jarak Jauh Secara Wireless Menggunakan Aplikasi Blynk", *JSTN*, vol. 1, no. 1, pp. 21–29, Apr. 2024.
- [13] Rytlahti, T., Tatang, D., Köpper, J., & Holz, T. (2018, April). Masters of time: An overview of the NTP ecosystem. In *2018 IEEE European Symposium on Security and Privacy (EuroS&P)* (pp. 122-136). IEEE.
- [14] Andrianto, H., Susanthi, Y., & Suryadi, D. (2018). Performance Evaluation of Low-cost GPS Time Server based on NTP. *TELKOMNIKA (Telecommunication Computing Electronics and Control)*, 16(6), 2528-2535.
- [15] Dinar, A. E., Merabet, B., & Ghouali, S. (2020). NTP Server Clock Adjustment with Chrony. In *Applications of Internet of Things: Proceedings of ICCCIOT 2020* (pp. 177-185). Singapore: Springer Singapore.
- [16] Mills, D. L. (2003). A brief history of NTP time: Memoirs of an Internet timekeeper. *ACM SIGCOMM Computer Communication Review*, 33(2), 9-21.
- [17] Durairajan, R., Mani, S. K., Sommers, J., & Barford, P. (2015, November). Time's forgotten: Using ntp to understand internet latency. In *Proceedings of the 14th ACM Workshop on Hot Topics in Networks* (pp. 1-7).
- [18] Mounabhargav, P., Yadav, D. S., Sharma, D., & Agarwal, A. (2024). Analysis of Ethernet Traffic Patterns on NTP Servers at CSIR NPL. *MAPAN*, 1-10.
- [19] Rybaczky, P. (2005). NTP Operational, Historical, and Futuristic Overview. *Expert Network Time Protocol: An Experience in Time with NTP*, 41-61.
- [20] Schmidt, R. E., & Fonville, B. (2010, November). An NTP stratum-one server farm fed by IEEE-1588. In *Proceedings of the 42nd Annual Precise Time and Time Interval Systems and Applications Meeting* (pp. 111-126)
- [21] Jun, S. M., Yu, D. H., Kim, Y. H., & Seong, S. Y. (1999, December). A time synchronization method for NTP. In *Proceedings Sixth International Conference on Real-Time Computing Systems and Applications. RTCSA'99 (Cat. No. PR00306)* (pp. 466-473). IEEE.
- [22] Jun, S. M., Yu, D. H., Kim, Y. H., & Seong, S. Y. (1999, December). A time synchronization method for NTP. In *Proceedings Sixth International Conference on Real-Time Computing Systems and Applications. RTCSA'99 (Cat. No. PR00306)* (pp. 466-473). IEEE.